



canopy detail and connection point

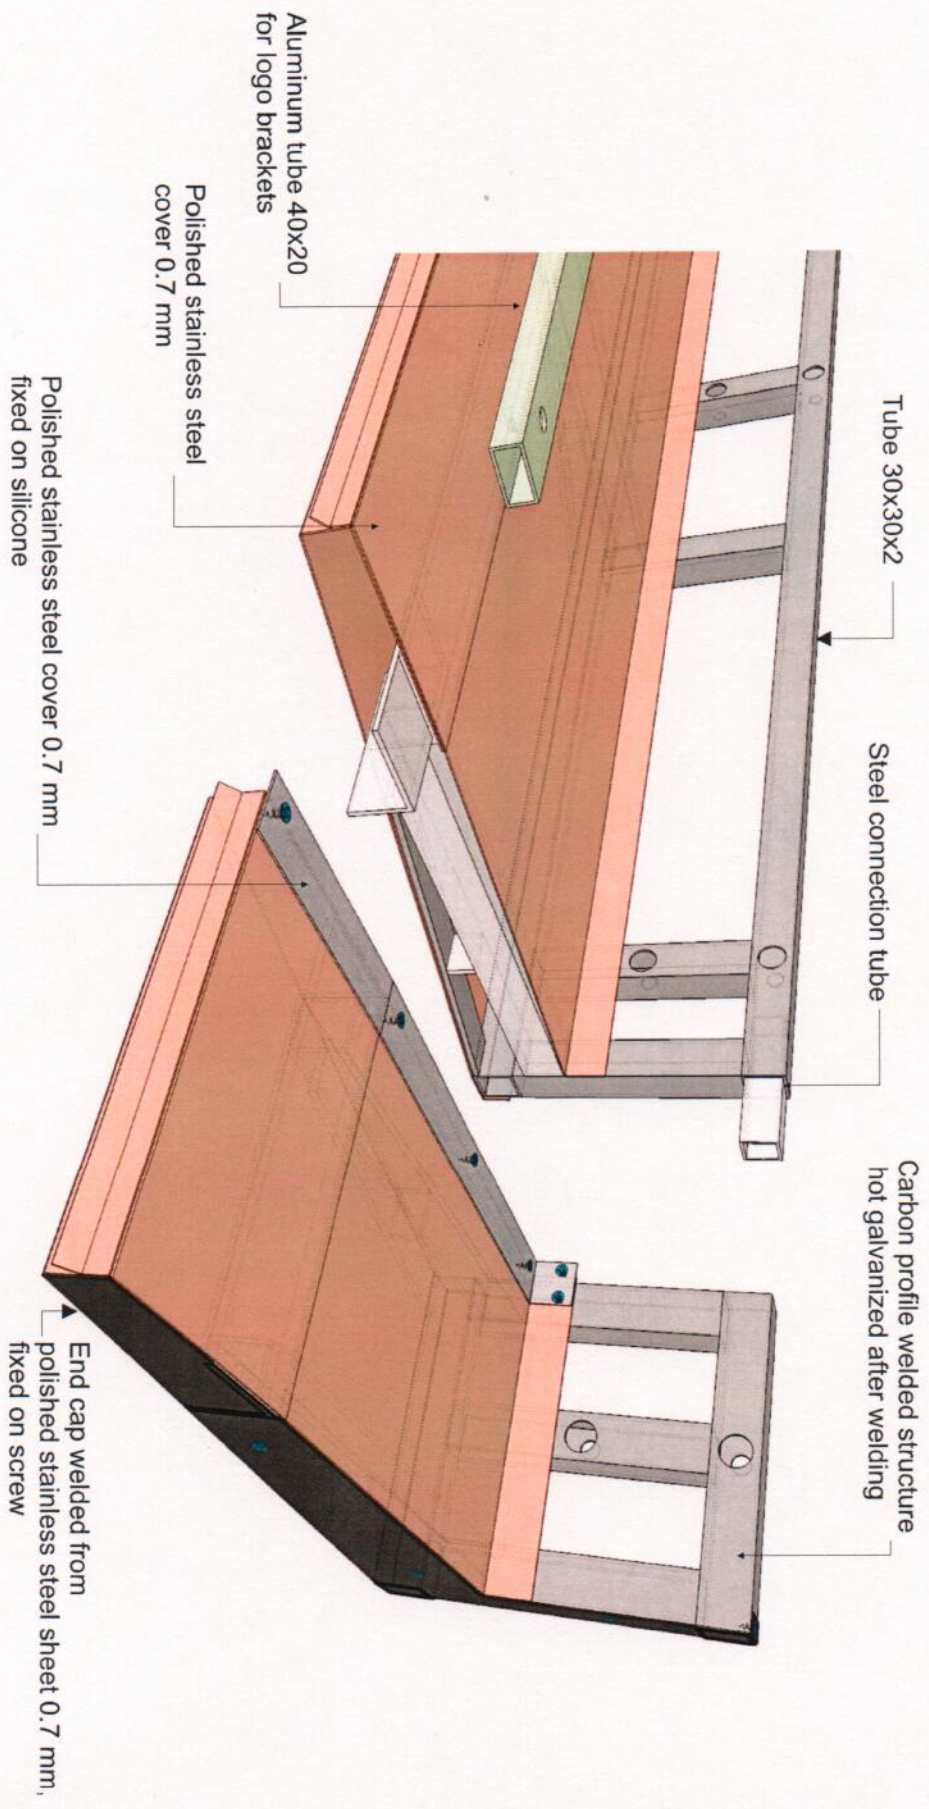


NOTE: DIMENSIONS MIGHT BE ADAPTED TO A LOCAL SITUATION AND REGULATION AT THE SPECIFIC LOCATION

NOTE: the tubes shall be covered with a stainless steel panel if used without fascia

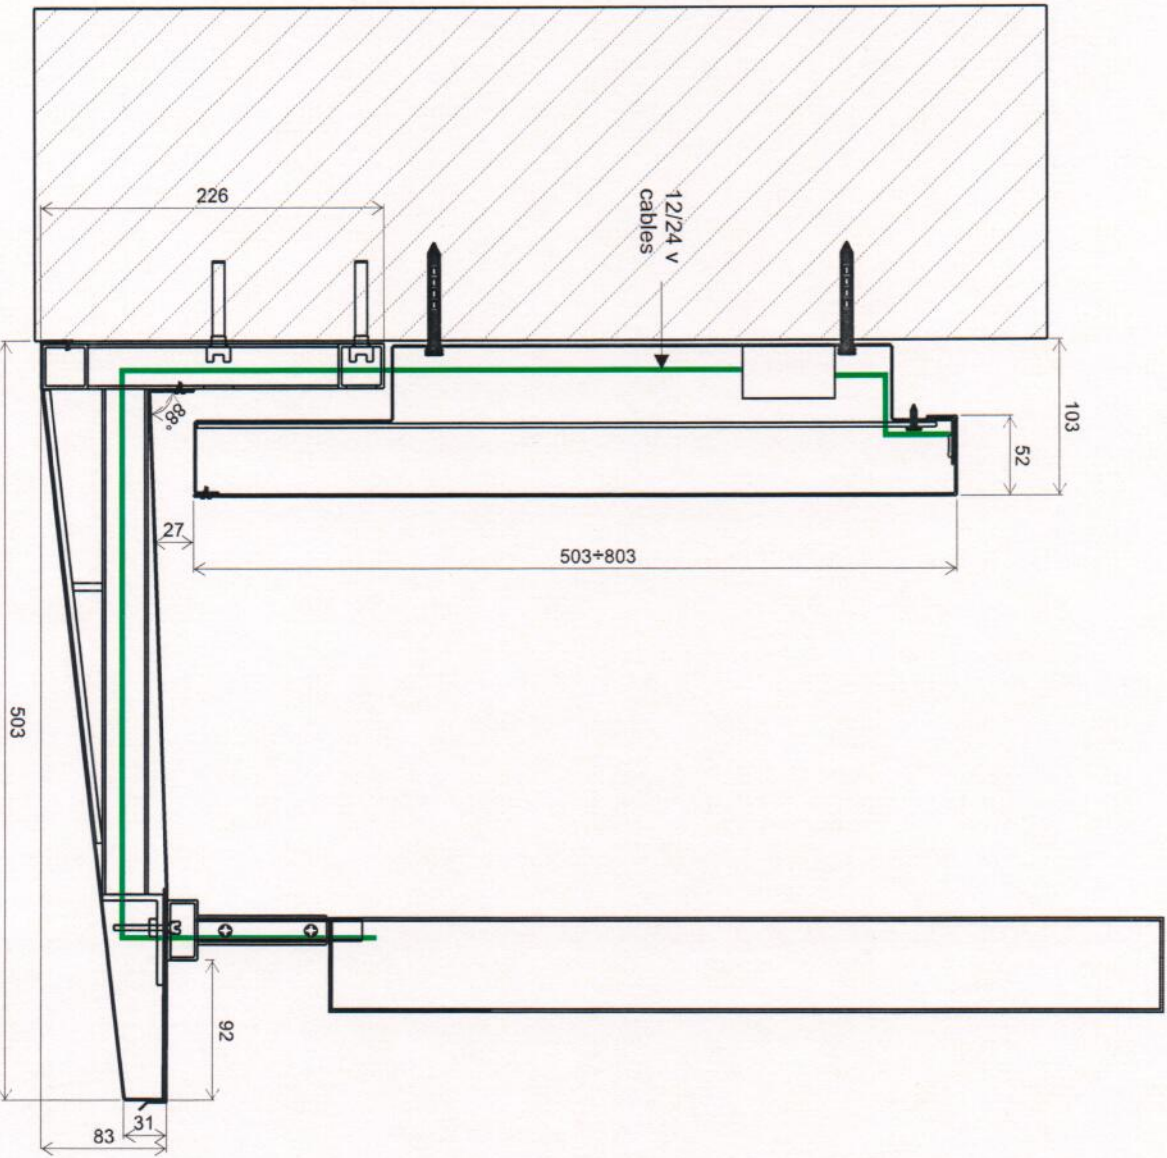


NOTE: DIMENSIONS MIGHT BE ADAPTED TO A LOCAL SITUATION AND REGULATION AT THE SPECIFIC LOCATION

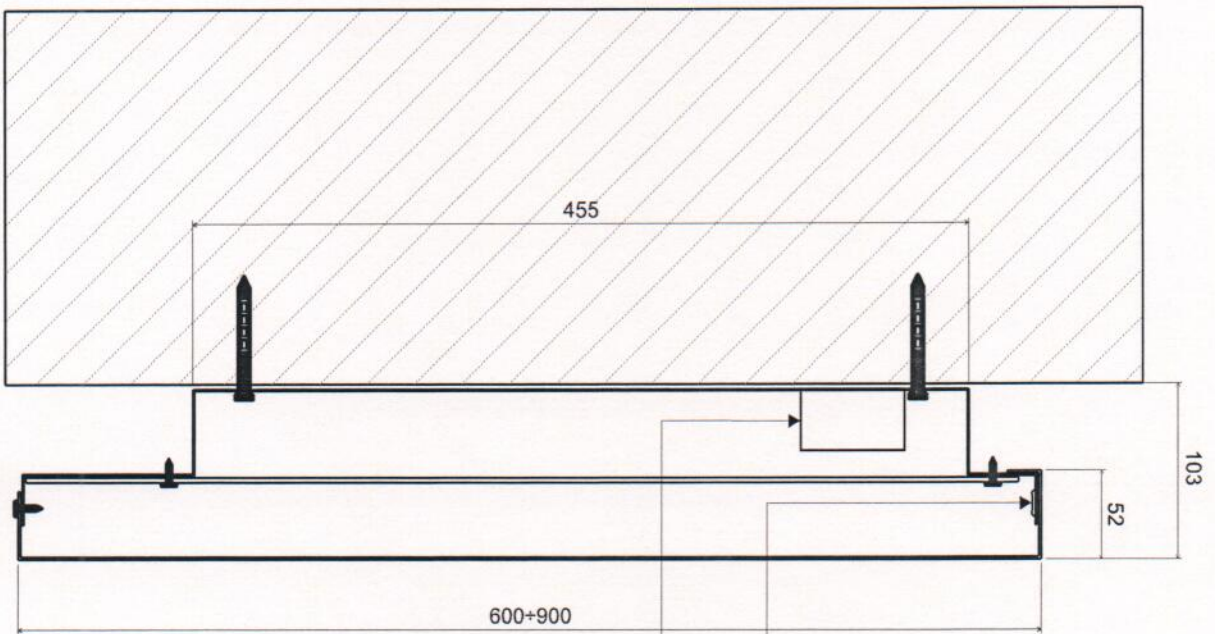

NOTE: DIMENSIONS MIGHT BE ADAPTED TO A LOCAL SITUATION AND REGULATION AT THE SPECIFIC LOCATION

LED stripe
PSU

Section 1

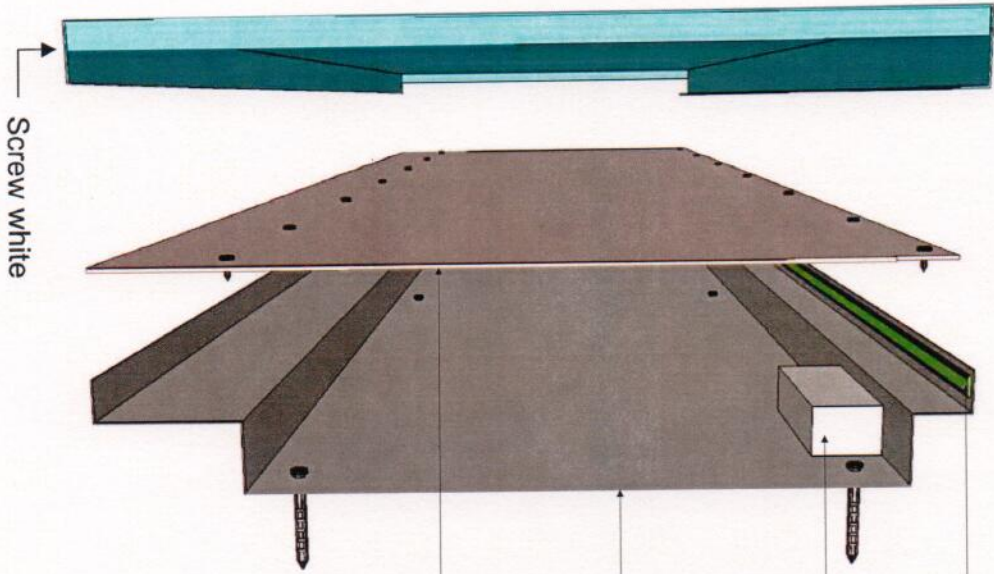

Osram LED stripe
LINEARlight POWER Flex®
Protect G2 – LF06P2--W4F-840-P

Osram power supply
OPTOTRONIC OT 50/220-240/24


Hot galvanized
steel sheet 0.7 mm,
powder coated from
outside white

3/0.21 mm single-sided
white PE-painted ACP sheet

Stock perforated
aluminum sheet 1.5 mm
powder coated RAL 9003
[see page 18 for perforation details]


Screw white



Section 2

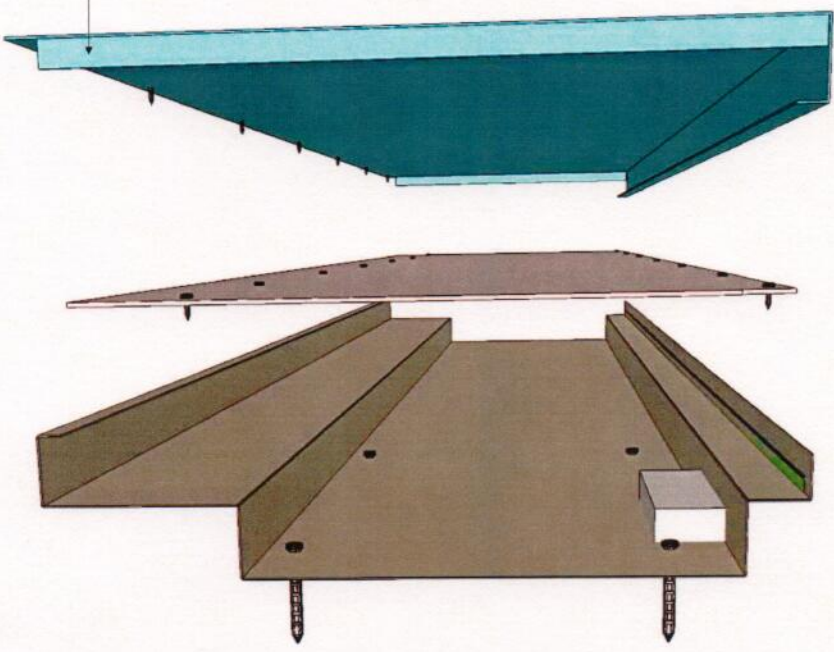

non-illuminated fascia dimension in section 1



NOTE: DIMENSIONS MIGHT BE ADAPTED TO A LOCAL SITUATION AND REGULATION AT THE SPECIFIC LOCATION

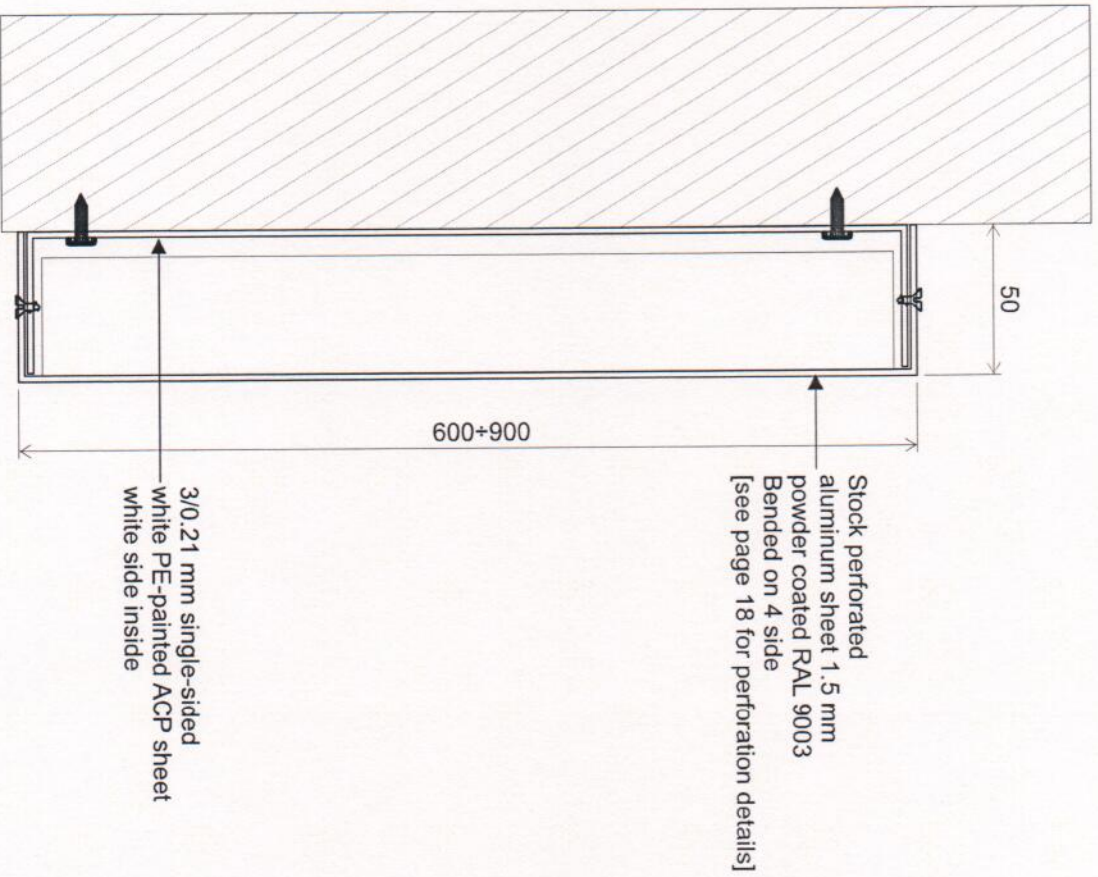

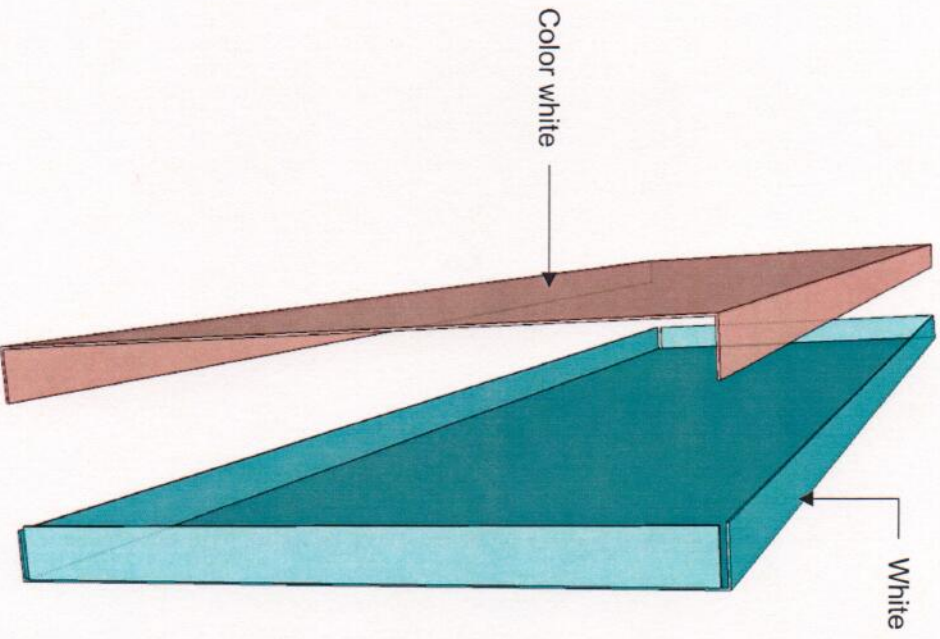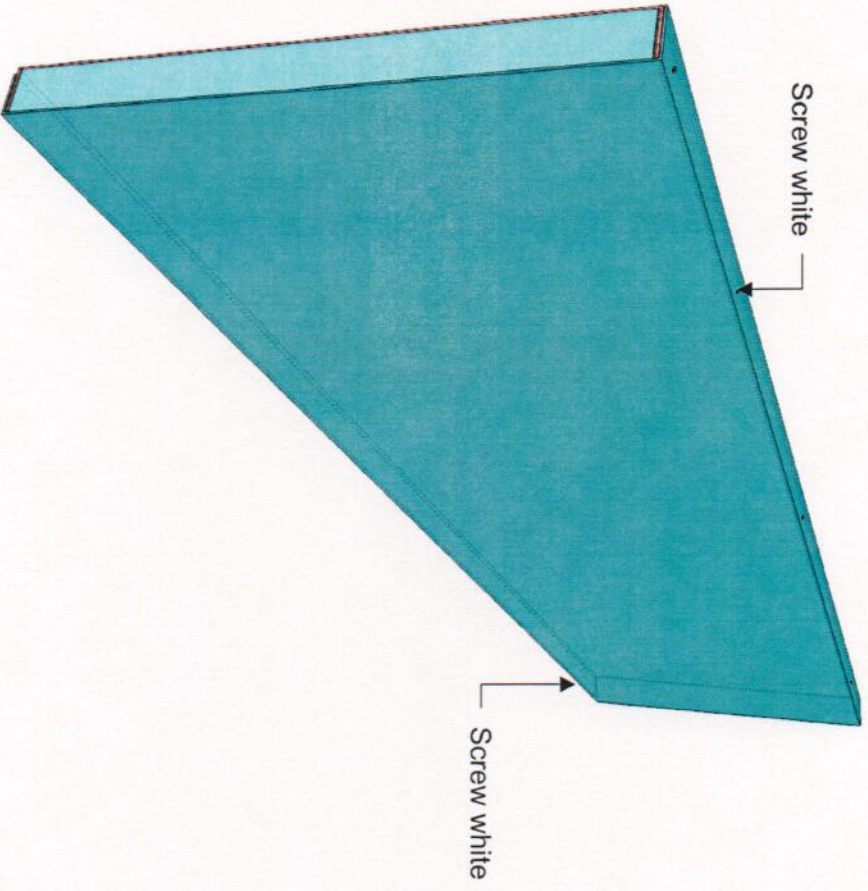

NOTE: DIMENSIONS MIGHT BE ADAPTED TO A LOCAL SITUATION AND REGULATION AT THE SPECIFIC LOCATION

NOTE: DIMENSIONS MIGHT BE ADAPTED TO A LOCAL SITUATION AND REGULATION AT THE SPECIFIC LOCATION

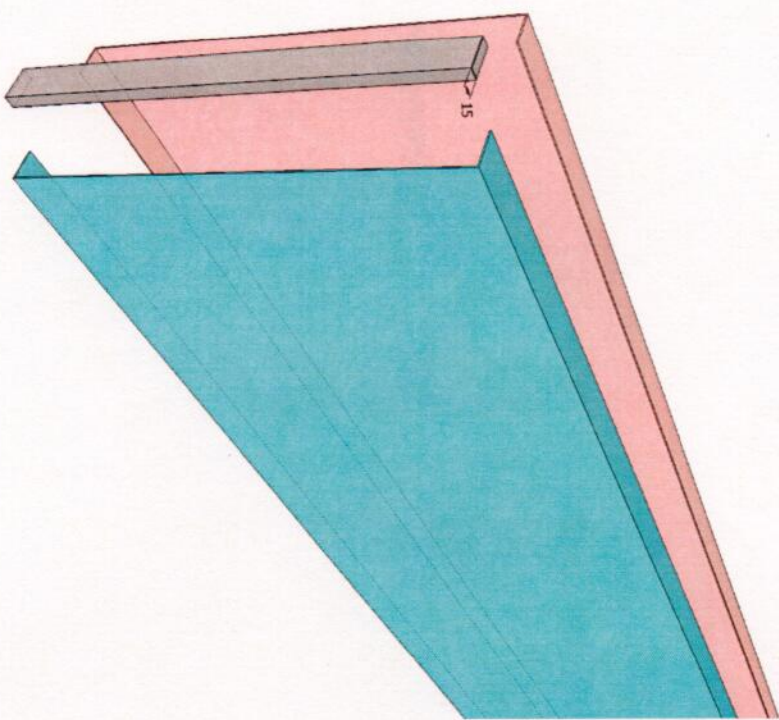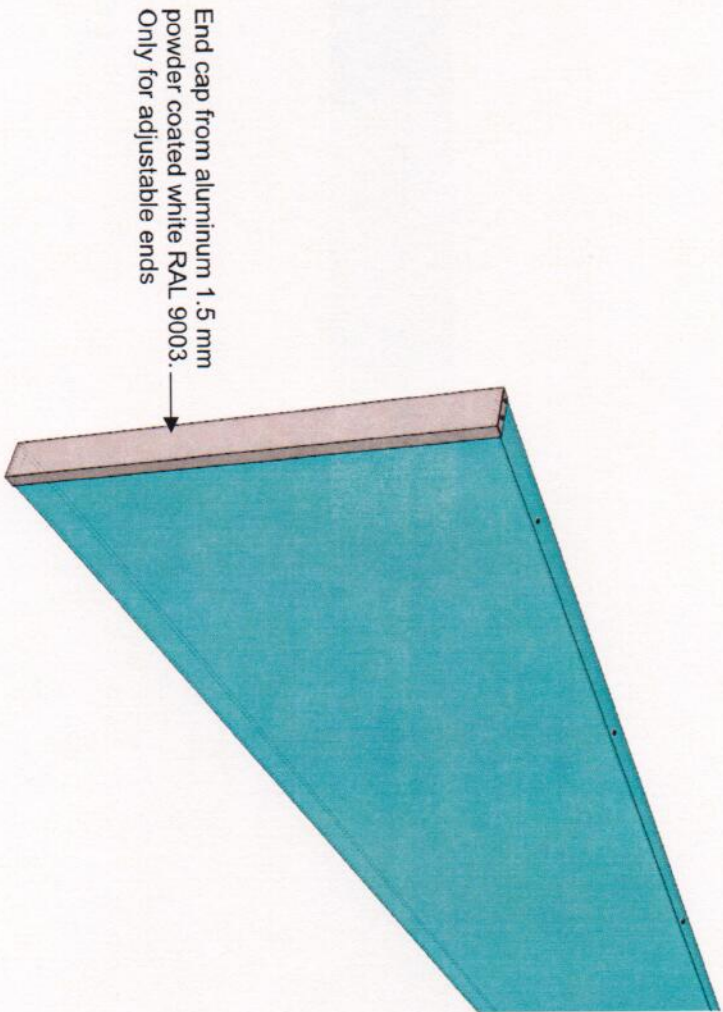

fascia perforation details stock aluminum sheet

NOTE: DIMENSIONS MIGHT BE ADAPTED TO A LOCAL SITUATION AND REGULATION AT THE SPECIFIC LOCATION

